

Resonators and stability

Examples of resonators

Unfolded resonator and ABCD description

Stability

- Ray picture

- Gaussian beam picture


2 mirror resonators and the stability map

Analysis of resonators

- beam sizes



Resonators

- Resonators provide feedback for the photons to build up by passing through the gain medium
- Curved mirrors are typically used to control the beam size inside the gain medium
- Types of resonators
 - Many resonators have more than two mirrors, but most can be mapped onto a two-mirror system.

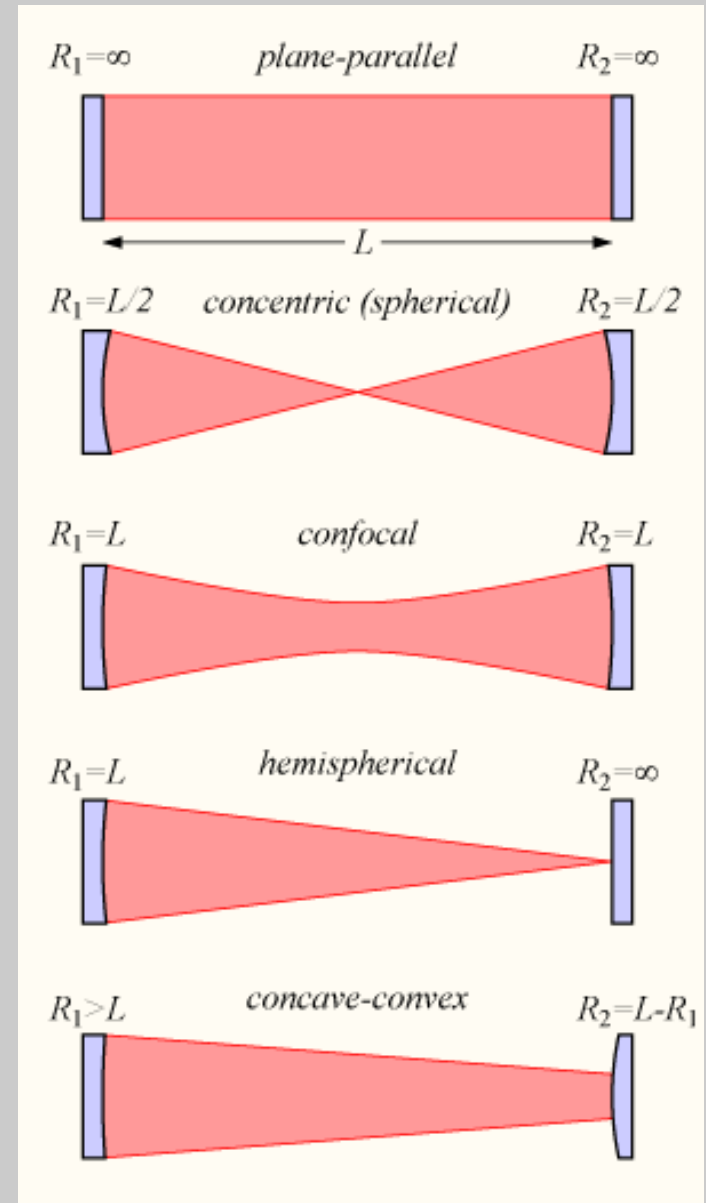

Periodic lens model


- A resonator can be “unfolded” by modeling the curved mirrors as ideal lenses

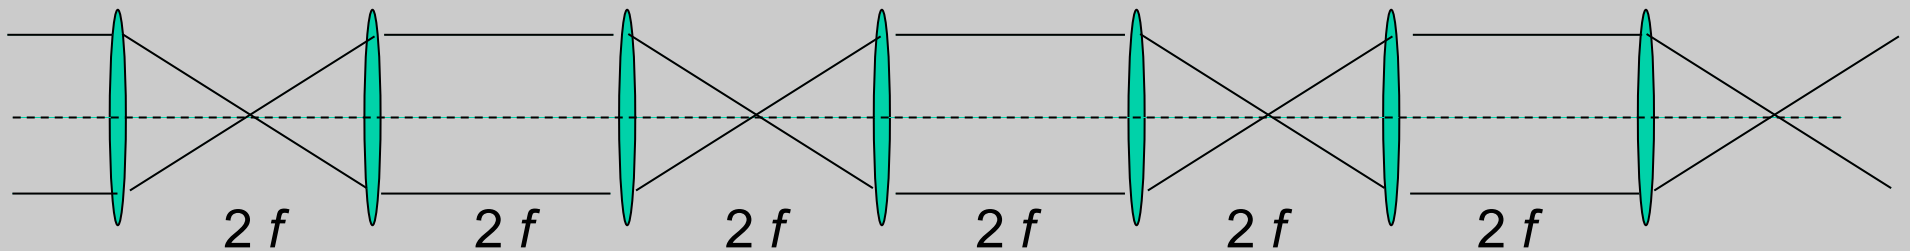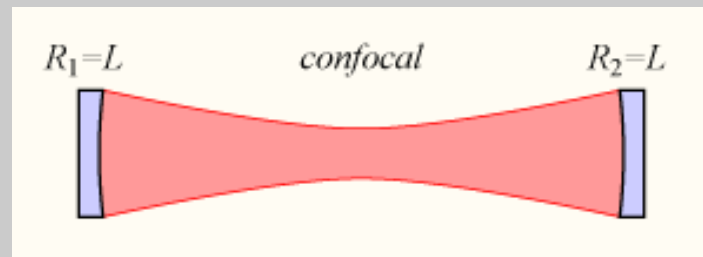

- Are there rays that will stay confined?
- If so, resonator is ***stable***.

Resonator ABCD model

- Build a ABCD matrix model of the periodic lens sequence
 - First get a *round-trip* matrix

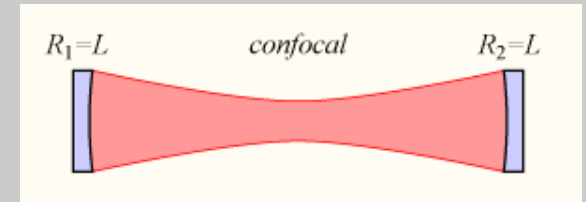

$$M_{RT}(f, L) = \begin{pmatrix} A & B \\ C & D \end{pmatrix} = M_L(f) \cdot M_T(L) \cdot M_L(f) \cdot M_T(L)$$

$$= \begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix} \begin{pmatrix} 1 & L \\ 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix} \begin{pmatrix} 1 & L \\ 0 & 1 \end{pmatrix}$$

- Free to choose starting point
- Focal length f and mirror separation L can vary

$$\begin{pmatrix} r_2 \\ r_2' \end{pmatrix} = \begin{pmatrix} A & B \\ C & D \end{pmatrix} \begin{pmatrix} A & B \\ C & D \end{pmatrix} \begin{pmatrix} r_0 \\ r_0' \end{pmatrix} \quad \text{After 2 round trips}$$

Resonator stability: ray picture

- Will a ray stay trapped?
- Look at whether r_n and r'_n stay finite as n goes to infinity

$$\begin{pmatrix} r_n \\ r'_n \end{pmatrix} = \begin{pmatrix} A & B \\ C & D \end{pmatrix}^n \begin{pmatrix} r_0 \\ r'_0 \end{pmatrix}$$

- Method: $M_{RT} = \begin{pmatrix} A & B \\ C & D \end{pmatrix} = U \begin{pmatrix} \lambda_a & 0 \\ 0 & \lambda_b \end{pmatrix} U^{-1}$
 - Diagonalize matrix:

$$\begin{aligned} \text{– then } M_{RT}^n &= \begin{pmatrix} A & B \\ C & D \end{pmatrix}^n = U \begin{pmatrix} \lambda_a & 0 \\ 0 & \lambda_b \end{pmatrix} U^{-1} U \begin{pmatrix} \lambda_a & 0 \\ 0 & \lambda_b \end{pmatrix} U^{-1} \dots \\ &= U \begin{pmatrix} \lambda_a & 0 \\ 0 & \lambda_b \end{pmatrix}^n U^{-1} = U \begin{pmatrix} \lambda_a^n & 0 \\ 0 & \lambda_b^n \end{pmatrix} U^{-1} \end{aligned}$$

Stability condition

- The ray will stay trapped (stable resonator) if

$$|\lambda_a| \leq 1 \quad |\lambda_b| \leq 1 \quad \frac{1}{|\lambda_a|} \leq 1 \quad \frac{1}{|\lambda_b|} \leq 1 \quad \text{Reverse propagation}$$

- Therefore matrix eigenvalues must satisfy $|\lambda_a| = |\lambda_b| = 1$
- Property of ABCD: $\det M_{RT} = \lambda_a \lambda_b = 1$

$$\therefore \lambda_a = e^{i\theta}, \lambda_b = \lambda_a^*$$

- Trace of M is invariant upon rotation of matrix:

$$\begin{aligned} \text{Tr } M_{RT} &= \lambda_a + \lambda_b = A + D \\ &= e^{i\theta} + e^{-i\theta} = 2 \cos \theta \end{aligned}$$

- Finally stability condition is:

$$-1 \leq \frac{A + D}{2} \leq 1$$

Some properties of ABCD matrices

1. Determinant = 1 if start and end points are in the same medium (same refr. Index)

- Example: $\begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix} \begin{pmatrix} 1 & L \\ 0 & 1 \end{pmatrix}$
- Counter example: dielectric interface $\begin{pmatrix} 1 & 0 \\ 0 & n_1/n_2 \end{pmatrix}$

- Therefore, $\det M = 1$, but note that eigenvalues can be real or complex

2. Complex eigenvalues are of the form $e^{\pm i\theta}$

- Outside of stability range, eigenvalues are real

$$\lambda_a = 1 / \lambda_b \quad \text{Tr } M_{RT} = \lambda_a + 1 / \lambda_a > 2 \quad \text{if } \lambda_a > 1$$

3. M is not necessarily unitary (where $M^{-1} = M^\dagger$)

Stability for Gaussian beams in resonators

- A stable resonator mode is one that repeats itself on each round trip

– Amplitude and phase are matched $\therefore q_{n+1} = q_n$

$$q_1 = \frac{Aq_0 + B}{Cq_0 + D} = q_0 \rightarrow Aq_0 + B = q_0(Cq_0 + D)$$

$$\rightarrow 0 = Cq_0^2 + (D - A)q_0 - B$$


$$q_0 = \frac{(A - D)}{2C} \pm \frac{1}{2C} \sqrt{(A - D)^2 + 4BC}$$

– Since $\frac{1}{q_0} = \frac{1}{R} - i \frac{\lambda}{\pi w^2}$ q_0 must be complex (w is finite)

$$\therefore (A - D)^2 + 4BC < 0$$

Stability for Gaussian beams in resonators


- We know: $(A - D)^2 + 4BC < 0$
- And, since $\det(M) = 1$ $AD - BC = 1$
 $(A - D)^2 + 4BC = (A - D)^2 + 4(AD - 1)$
 $= A^2 - 2AD + D^2 + 4AD - 4$
 $= (A + D)^2 - 4 < 0$
- Stability condition: $\frac{(A + D)^2}{4} < 1$

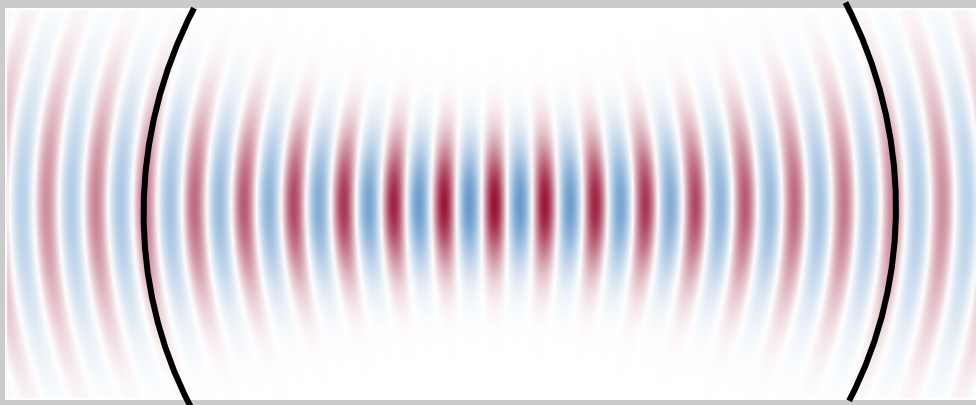

If this condition is satisfied, curvature of each end mirror matches wavefront curvature.

2 mirror cavity stability

- Important example
 - many resonators can be mapped to a 2 mirror cavity

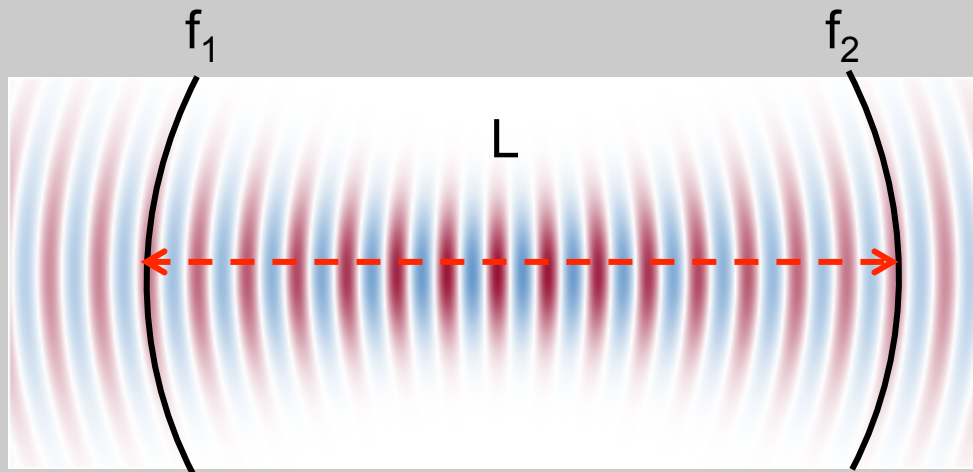

$$M = \begin{pmatrix} 1 & 0 \\ -1/f_1 & 1 \end{pmatrix} \begin{pmatrix} 1 & L \\ 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 0 \\ -1/f_2 & 1 \end{pmatrix} \begin{pmatrix} 1 & L \\ 0 & 1 \end{pmatrix}$$

$$M = \begin{pmatrix} 1 & L \\ -1/f_1 & 1 - L/f_1 \end{pmatrix} \begin{pmatrix} 1 & L \\ -1/f_2 & 1 - L/f_2 \end{pmatrix}$$

Stability for 2 mirror resonator

- Stability condition: $\frac{(A+D)^2}{4} < 1 \rightarrow -1 < \frac{A+D}{2} < 1$
 - Evaluate A and D from round-trip matrix

$$M = \begin{pmatrix} 1 & L \\ -1/f_1 & 1 - L/f_1 \end{pmatrix} \begin{pmatrix} 1 & L \\ -1/f_2 & 1 - L/f_2 \end{pmatrix}$$

$$A = 1 - L/f_2 \qquad f_1 = R_1/2 \qquad f_2 = R_2/2$$

$$D = -L/f_1 + (1 - L/f_1)(1 - L/f_2)$$

$$\begin{aligned} \frac{A+D}{2} &= \frac{1}{2} \left(1 - \frac{2L}{R_2} - \frac{2L}{R_1} + 1 - \frac{2L}{R_1} - \frac{2L}{R_2} + \frac{4L^2}{R_1 R_2} \right) \\ &= 1 - \frac{2L}{R_1} - \frac{2L}{R_2} + \frac{2L^2}{R_1 R_2} = 2 \left(1 - \frac{L}{R_1} \right) \left(1 - \frac{L}{R_2} \right) - 1 \equiv 2g_1 g_2 - 1 \end{aligned}$$

2 mirror stability and the stability map

- Cavity is stable if $-1 < \frac{A+D}{2} < 1$ $-1 < 2g_1g_2 - 1 < 1$
- Stable in shaded regions
- Unstable in white regions

$$0 \leq g_1g_2 \leq 1$$

$$g_1 = 1 - \frac{L}{R_1} \quad g_2 = 1 - \frac{L}{R_2}$$

1st and 3rd quadrants:

Positive branch:


$0 < g_1 g_2 < 1$ **stable**

$g_1 g_2 > 1$ **unstable**

2nd and 4th quadrants:

Negative branch: $g_1 g_2 < 0$

All resonators are unstable in these quadrants

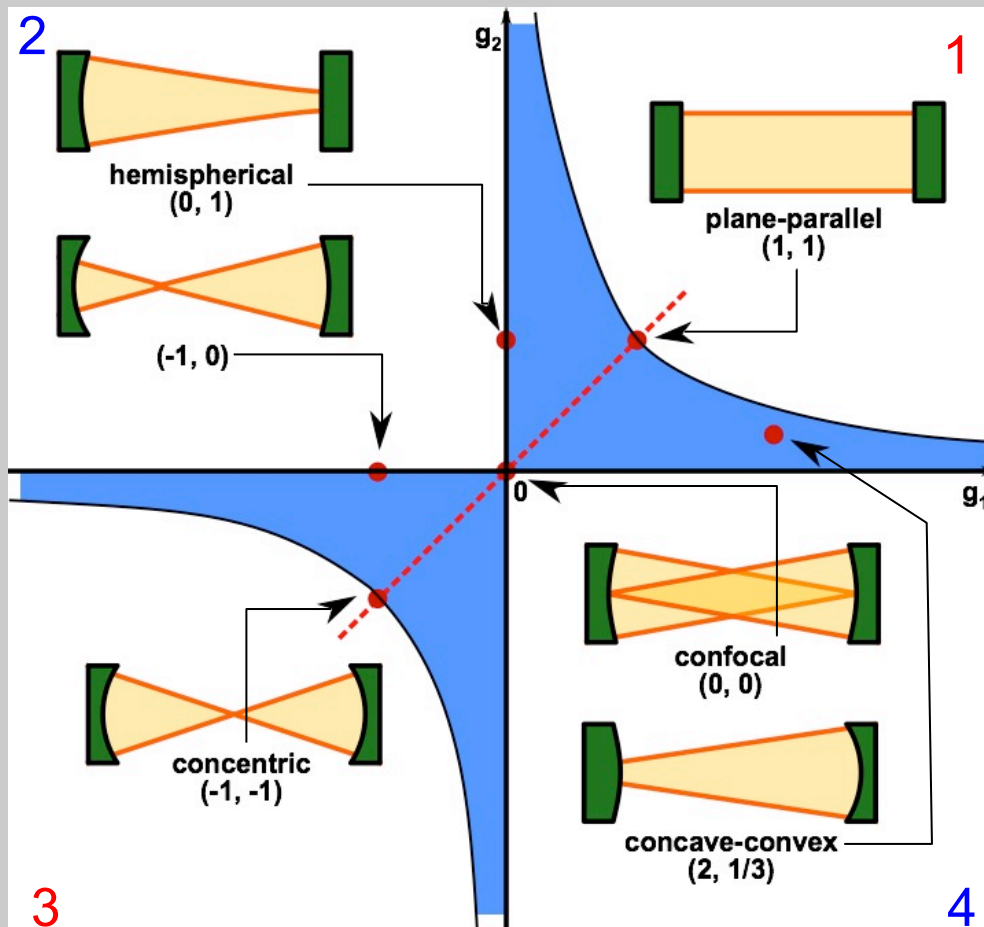

Boundaries of stability

$$g_1 = 1 - \frac{L}{R_1} \quad g_2 = 1 - \frac{L}{R_2}$$

- Easily identified stable resonators are actually at edge of stability

