


2 mirror stability and the stability map

- Cavity is stable if $-1 < \frac{A+D}{2} < 1$ $-1 < 2g_1g_2 - 1 < 1$
- Stable in shaded regions
- Unstable in white regions

$$0 \leq g_1g_2 \leq 1$$

$$g_1 = 1 - \frac{L}{R_1} \quad g_2 = 1 - \frac{L}{R_2}$$

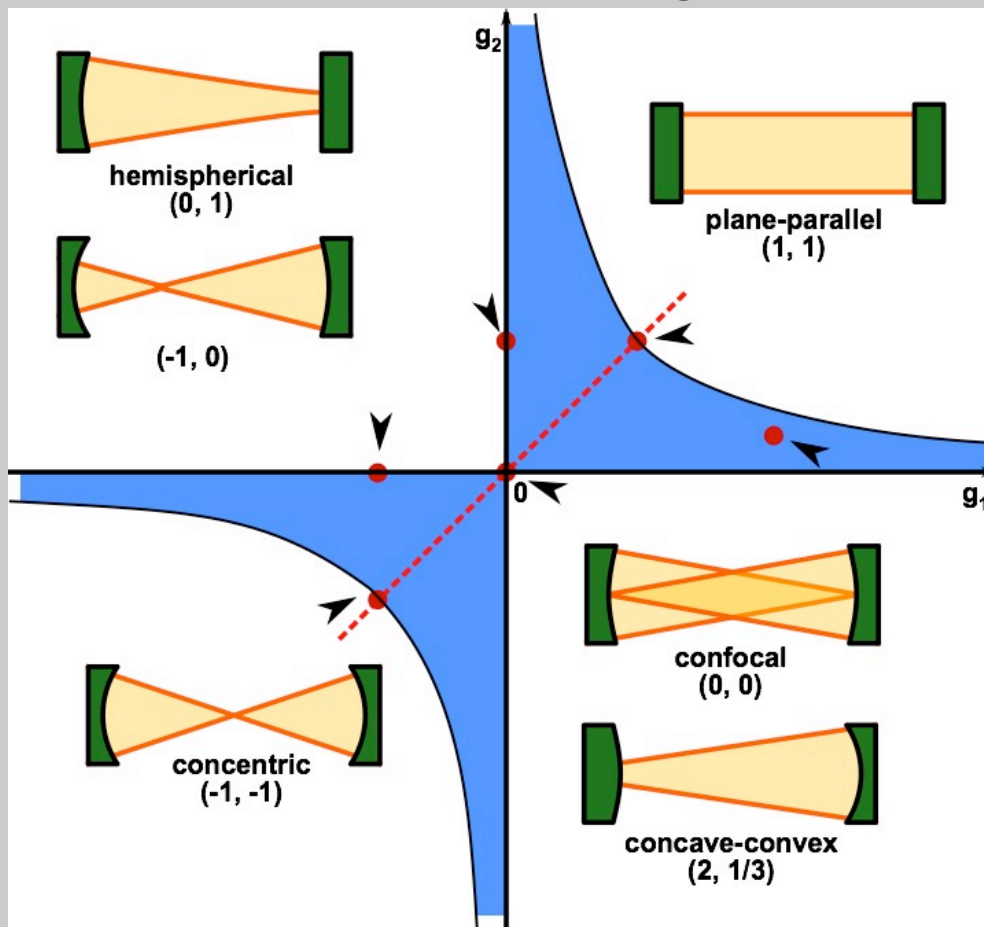

1st and 3rd quadrants:

Positive branch:

$0 < g_1 g_2 < 1$ **stable**

$g_1 g_2 > 1$ **unstable**

No focal point inside resonator

2nd and 4th quadrants:

Negative branch: $g_1 g_2 < 0$

One center of curvature


inside resonator

focal point inside resonator

Unstable resonators

Unstable resonators often use beam magnification to output couple past a mirror.

- Gain must be sufficient to overcome diffractive losses.

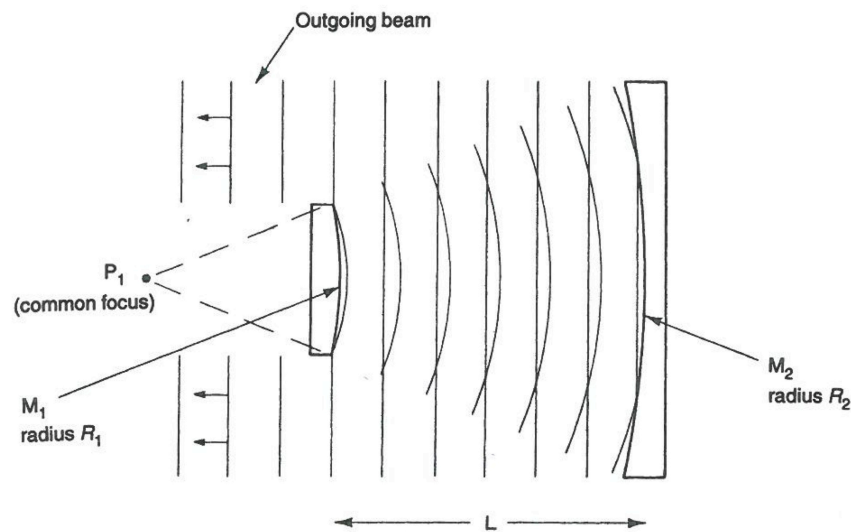


Telescope magnification:


$$M = \frac{f_2}{f_1} = \frac{R_2}{R_1}$$

Output coupling loss per round trip:

$$\frac{A_2}{A_1} = M^2 = \left(\frac{R_2}{R_1} \right)^2$$

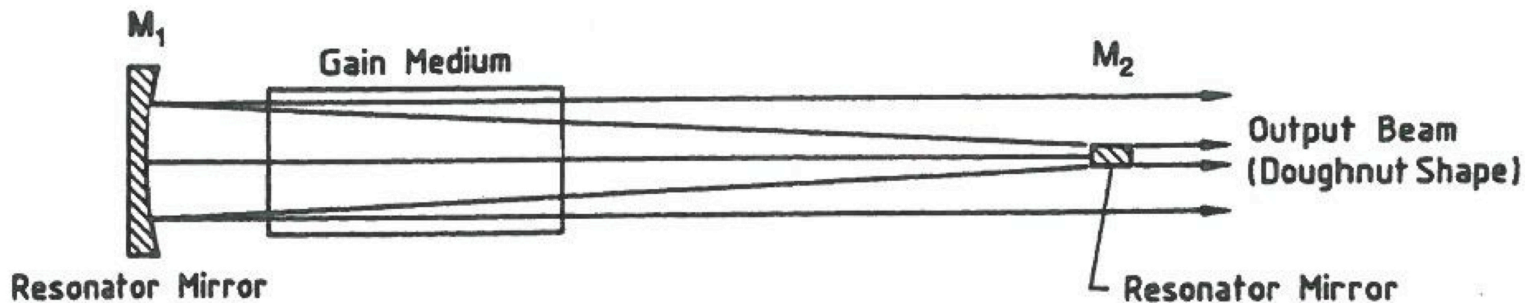


Negative branch unstable resonators

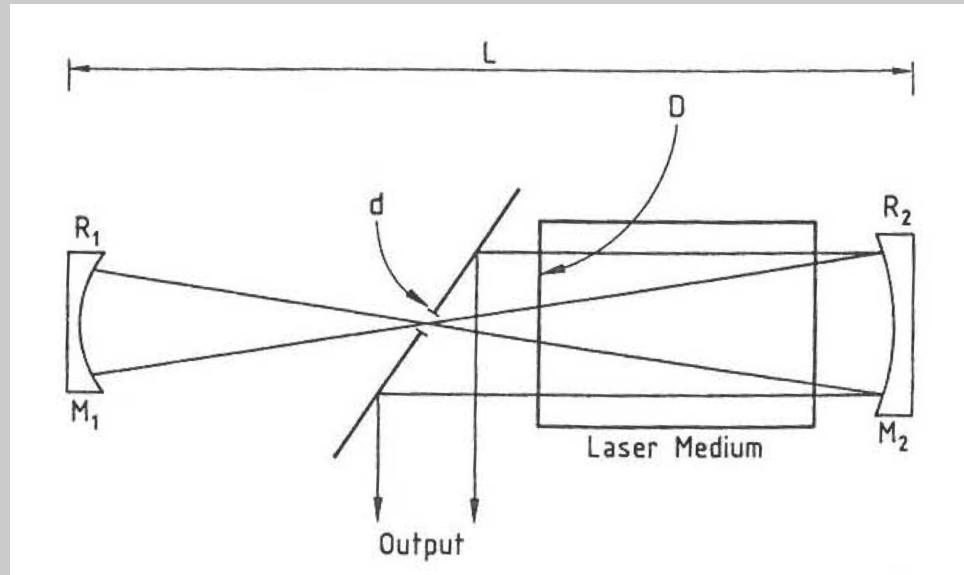

Aperture at intermediate focus
- Acts as an internal spatial filter

“scraper mirror” output

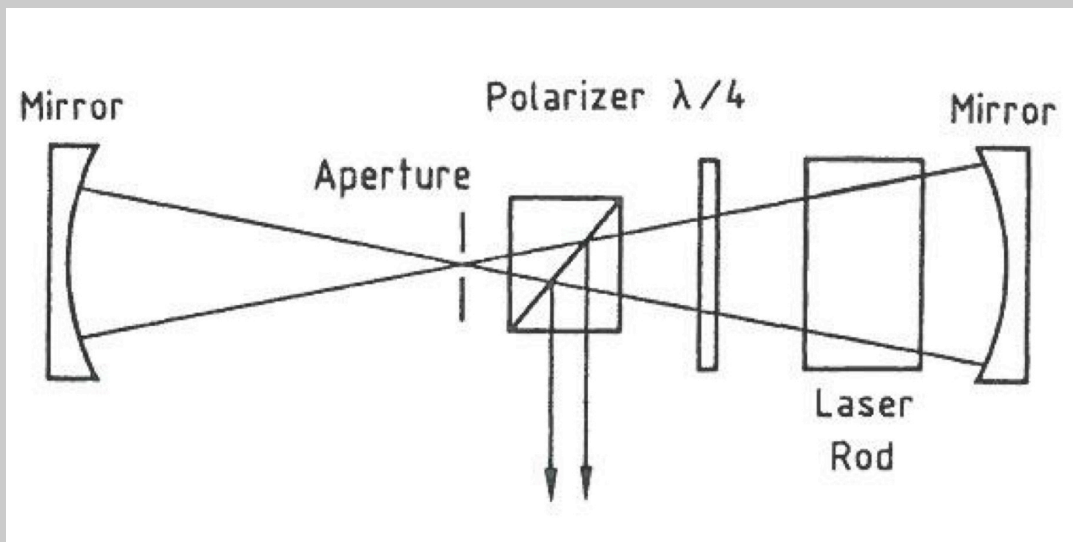

Polarization-coupled output


Self-filtering unstable resonator

Gobbi, Opt Commun 52, 195 (1984)

- Confocal resonator with magnification

sequence:

1. Collimated beam from M2 toward PH
2. PH clips beam, reduces energy by ratio f_2/f_1
3. Airy diffraction pattern imaged to PH by M1

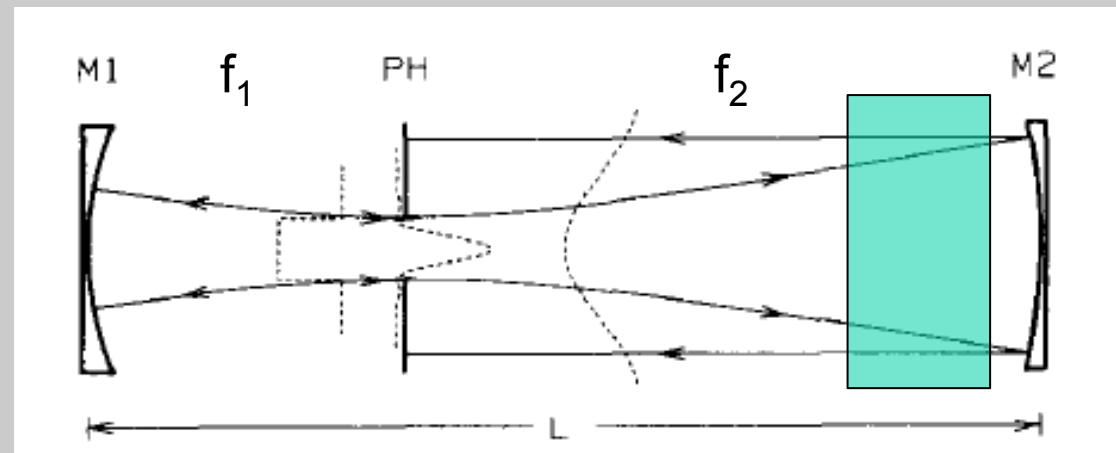


$$E(r) \propto J_1\left(\frac{ka}{f_1}r\right) / \frac{ka}{f_1}r$$

first zero at $r = 1.22 f_1 \lambda / 2a$

4. PH radius at first zero: passes 84% of power
5. M2 recollimates beam

**For $M=3$, round trip transmission $\sim 30\%$
Use with high gain**

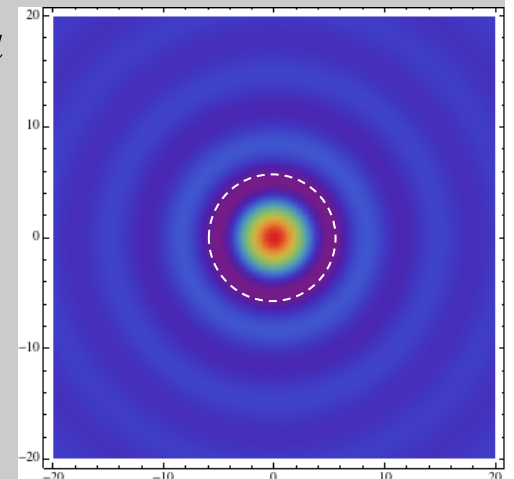

Zig-zag slab resonator

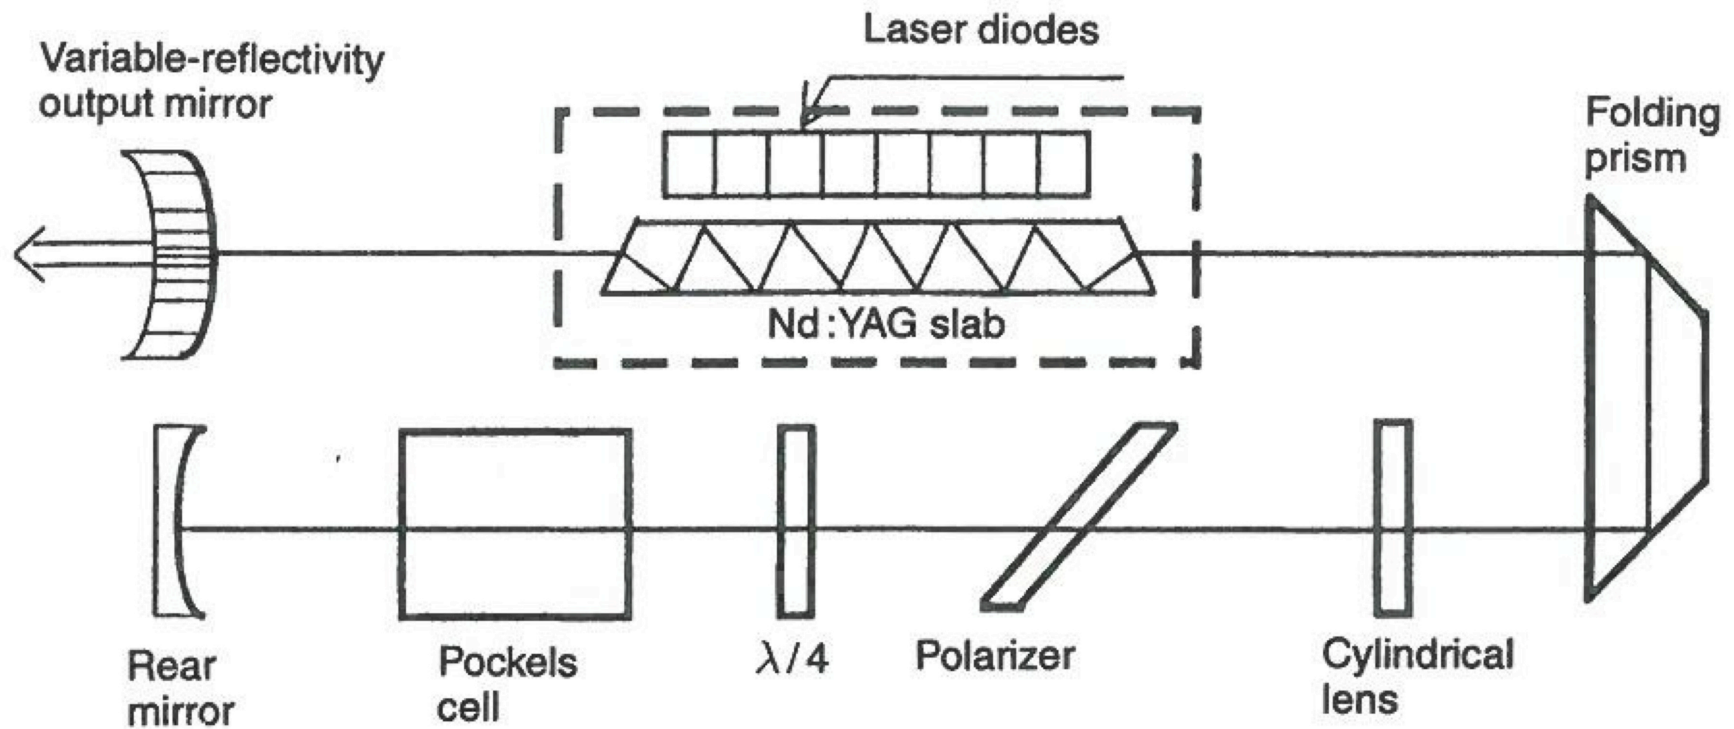


Fig. 5.50. Diode-pumped Nd:YAG slab laser with positive-branch unstable resonator and variable reflectivity output coupler [5.76]

Generalized ABCD

- Examples:
 - Variable output coupling mirrors
 - Radially-dependent gain
 - Parabolic refractive index profiles
 - Parabolic gain profiles – gain guiding
- ABCD with gain and loss lead to complex terms
 - Qualitative change to stability
 - Need additional modeling to calculate net gain and loss
(ABCD is for beam shape, not amplitude)

Variable reflectivity mirror

- Gaussian mirror: graded reflectivity dielectric coating
 - Beam curvature unaffected
 - Beam size is reduced:

$$e^{-r^2/w_2^2} = e^{-r^2/w_1^2} e^{-r^2/w_m^2} \quad \frac{1}{q_2} = \frac{1}{R} - i \frac{\lambda}{\pi} \left(\frac{1}{w_1^2} + \frac{1}{w_m^2} \right) = \frac{1}{q_1} - i \frac{\lambda}{\pi w_m^2}$$

Compare to gaussian beam ABCD

$$q_2^{-1} = \frac{C + Dq_1^{-1}}{A + Bq_1^{-1}}$$

$$A = 1, B = 0$$

$$C = -i \frac{\lambda}{\pi w_m^2}, D = 1$$

Gaussian mirror	lens
$\begin{pmatrix} 1 & 0 \\ -i \frac{\lambda}{\pi w_m^2} & 1 \end{pmatrix}$	$\begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix}$

Acts like a lens with imaginary focal length!

Spatial gain narrowing

- Assume longitudinal pumping with Gaussian beam
- Even though gain adds to pulse energy, effect is similar to the Gaussian mirror

$$e^{-r^2/w_2^2} = e^{-r^2/w_1^2} \exp\left[-\frac{\Gamma_{stor}}{\Gamma_{sat}} \exp\left[-2r^2 / w_g^2\right]\right]$$
$$\approx G_0 e^{-r^2/w_1^2} \exp\left[-2r^2 / w_g^2\right]$$

G_0 is peak gain on axis

Expand $\exp[]$ in exponent, keeping parabolic term

$$\begin{pmatrix} 1 & 0 \\ -i\frac{2\lambda}{\pi w_g^2} & 1 \end{pmatrix}$$

ABCD only keeps track of beam width and radius of curvature – not loss or gain

Both versions enforce “stability”

Need to be careful about results of trace.

Gradient index profiles

- Laser rod has extended interaction with beam
 - Thermal lensing and gain affect beam propagation
- Ideal lens changes wavefront curvature

$$E_{out}(r) = E_{in}(r) e^{-ikr^2/2f}$$

- Can accomplish the same effect with a gradient index medium, e.g.

$$n(r) = n_0 \left(1 - \frac{k_2}{2k} r^2 \right)$$

k_2 is a constant to control curvature

- For a thin medium:


$$E_{out}(r) = E_{in}(r) e^{ikn_0 \left(1 - \frac{k_2}{2k} r^2 \right) L} = E_{in}(r) e^{ikn_0 L} e^{-ikL \frac{n_0 k_2}{2k} r^2}$$

$$f = \frac{k}{n_0 k_2 L}$$


GRIN lens: diffuse ions into lens material
Thermal profiles: $n[T(r)]$

The mirage effect

- Model index gradient as a sequence of layers




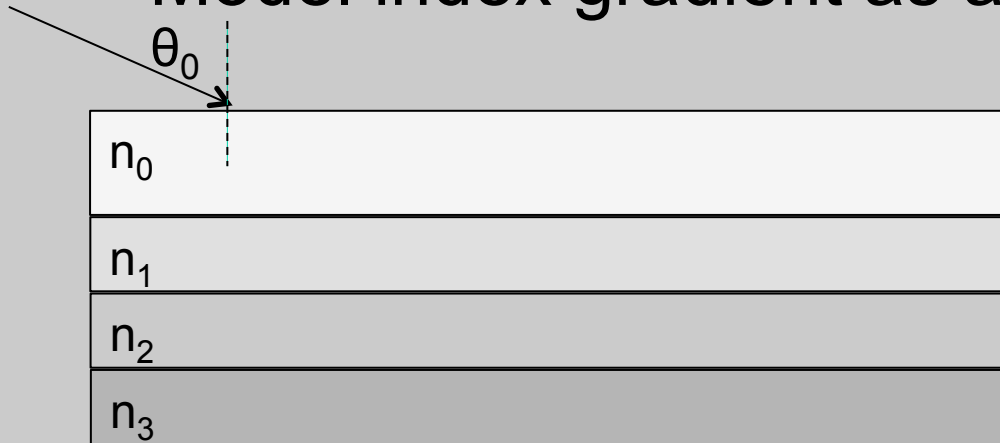


Find condition for turning point

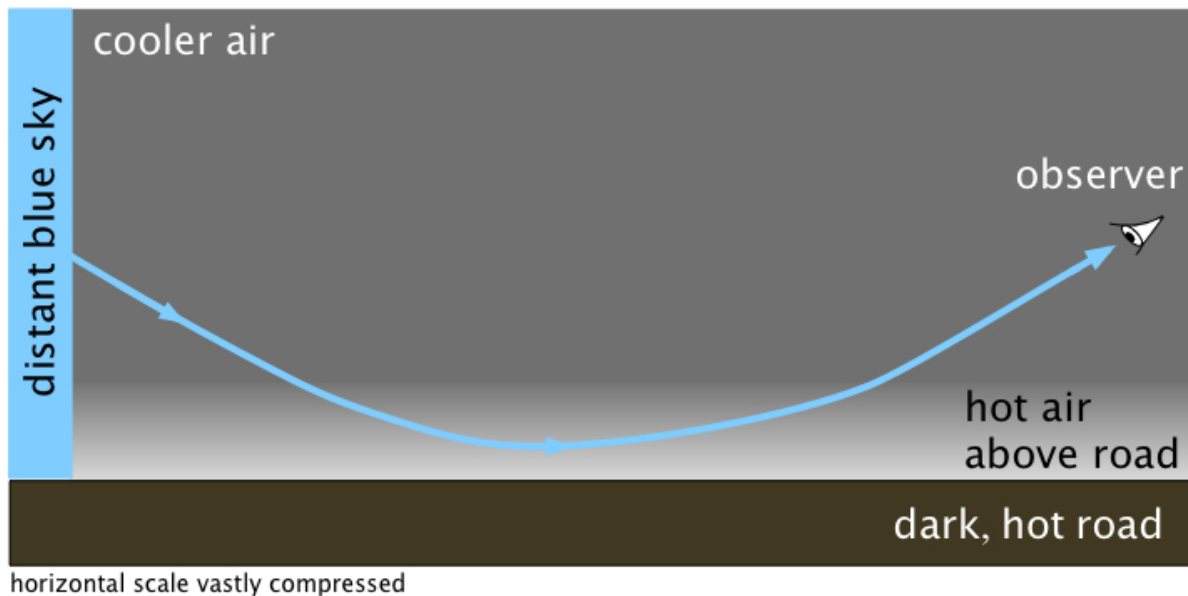

The lens waveguide

- A sequence of positive lenses can act as a waveguide

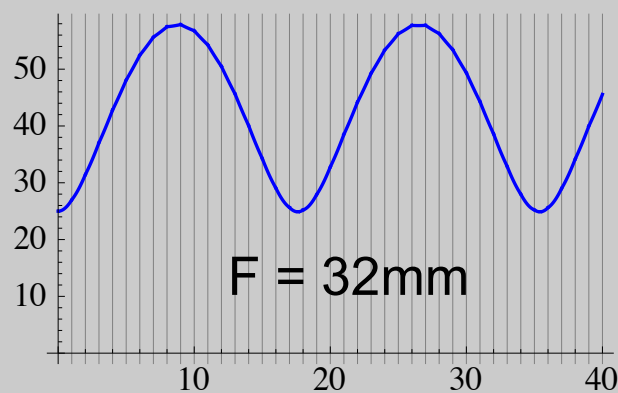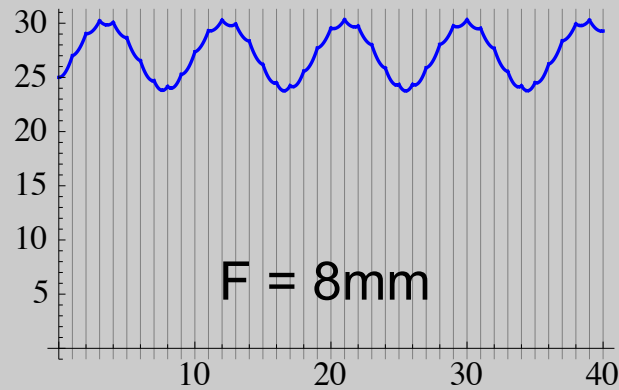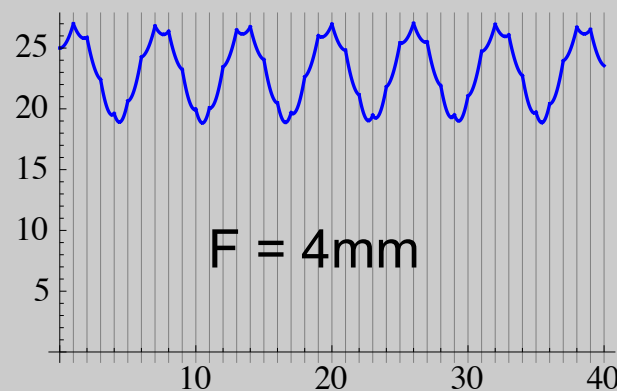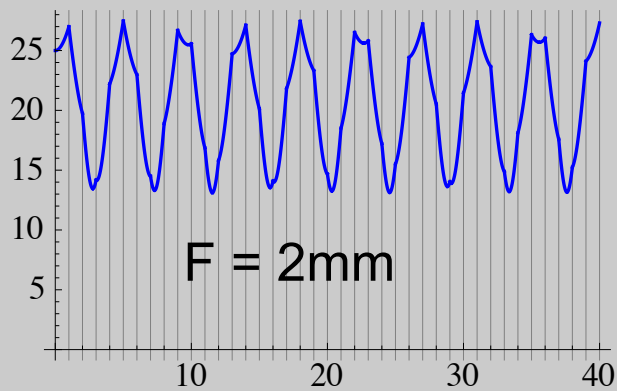

Weaker lens:
Smoother profile

Ray equation for parabolic gradient

- Parabolic index gradient: $n(r) = n_0 \left(1 - \frac{k_2}{2k} r^2 \right)$
- Ray equation: $\frac{d^2 r}{dz^2} + \frac{k_2}{k} r = 0$
- height and angle oscillate: compare to SHO

Solution, including initial conditions

$$r(z) = \cos(k_{osc} z) r_0 + \frac{1}{k_{osc}} \sin(k_{osc} z) r'_0 \quad k_{osc} = \sqrt{k_2 / k}$$

$$r'(z) = -k_{osc} \sin(k_{osc} z) r_0 + \cos(k_{osc} z) r'_0$$

Note that the period of oscillation is $Z_{osc} = 2\pi \sqrt{k / k_2}$

Can put this into ABCD form:



$$\begin{pmatrix} r(z) \\ r'(z) \end{pmatrix} = \begin{pmatrix} \cos(k_{osc} z) & \frac{1}{k_{osc}} \sin(k_{osc} z) \\ -k_{osc} \sin(k_{osc} z) & \cos(k_{osc} z) \end{pmatrix} \begin{pmatrix} r_0 \\ r'_0 \end{pmatrix}$$

Gaussian beam solution

- Can use exact same ABCD matrix
 - Apply Gaussian ABCD rule:

$$q_1 = \frac{Aq_0 + B}{Cq_0 + D} \quad q(z) = \frac{q_0 \cos(k_{osc}z) + \frac{1}{k_{osc}} \sin(k_{osc}z)}{-q_0 k_{osc} \sin(k_{osc}z) + \cos(k_{osc}z)}$$

- Example: input beam waist, w_0 $q_0 = -i \frac{\lambda}{\pi w_0^2}$

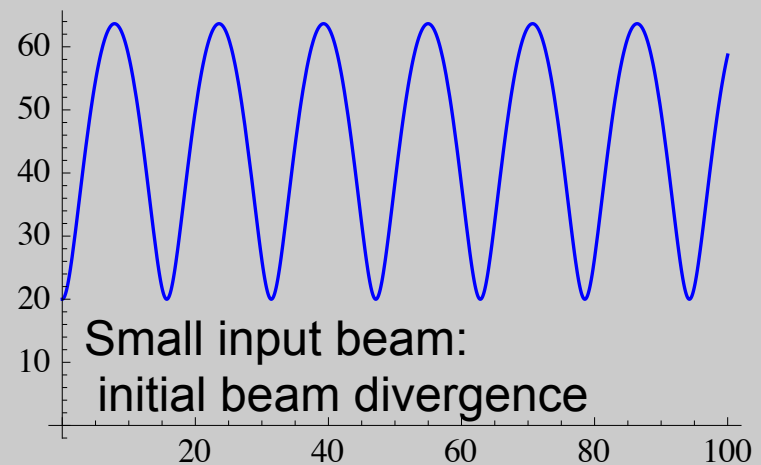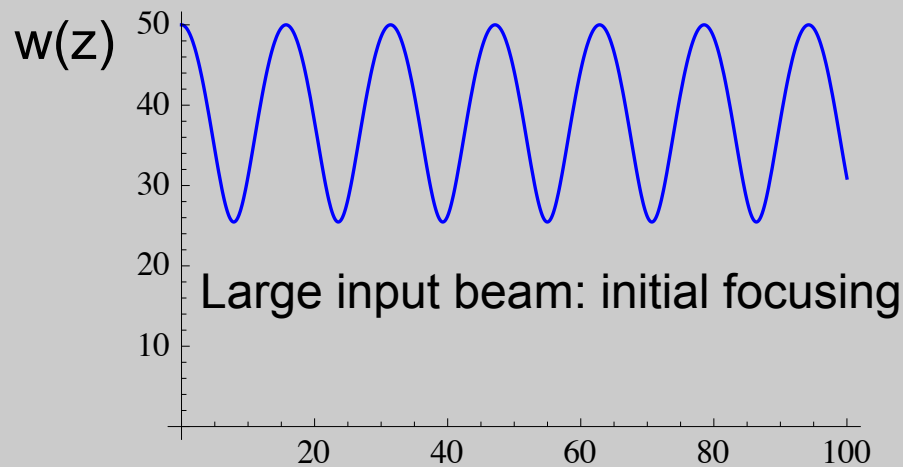

Gradient index waveguide

- Optical fibers: can be made with a gradient index
 - Is there a stable mode size?

$$q(z) = \frac{q_0 \cos(k_{osc}z) + \frac{1}{k_{osc}} \sin(k_{osc}z)}{-q_0 k_{osc} \sin(k_{osc}z) + \cos(k_{osc}z)} = q_0$$

- Solve for guided mode:


$$q_0 + \frac{1}{k_{osc}} \tan(k_{osc}z) = -q_0^2 k_{osc} \tan(k_{osc}z) + q_0$$

$$\rightarrow \left(q_0^2 k_{osc} + \frac{1}{k_{osc}} \right) \tan(k_{osc}z) = 0$$

For $\left(q_0^2 k_{osc} + \frac{1}{k_{osc}} \right) = 0$


then no z-dependence

$$q_0^2 = -k_{osc}^2 \rightarrow z_R = 1/k_{osc} = \sqrt{k/k_2}$$

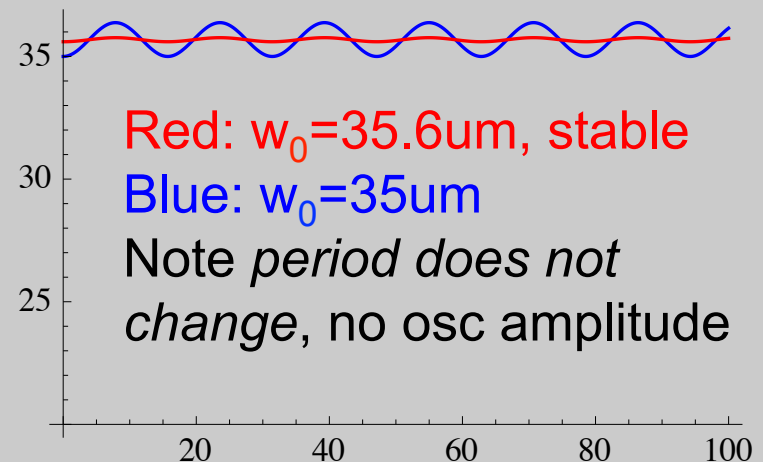

Guiding condition: wave perspective




- w/o guiding, the beam will naturally develop diverging wavefront curvature

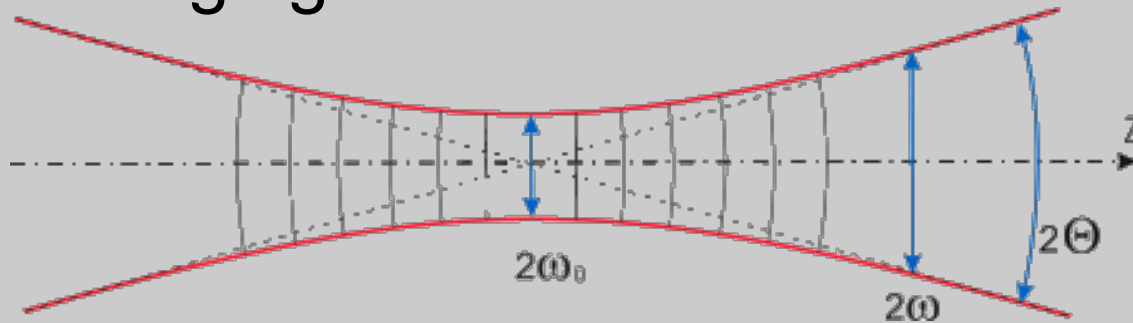



- Parabolic waveguide pulls central wavefront back, inducing focusing wavefront curvature
- If focusing balances diffraction: stable mode

Example: plasma waveguide for intense pulses

- Line focus in gas, ionization, radial expansion w/ shock wave

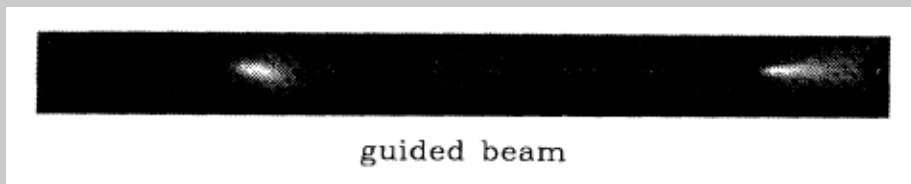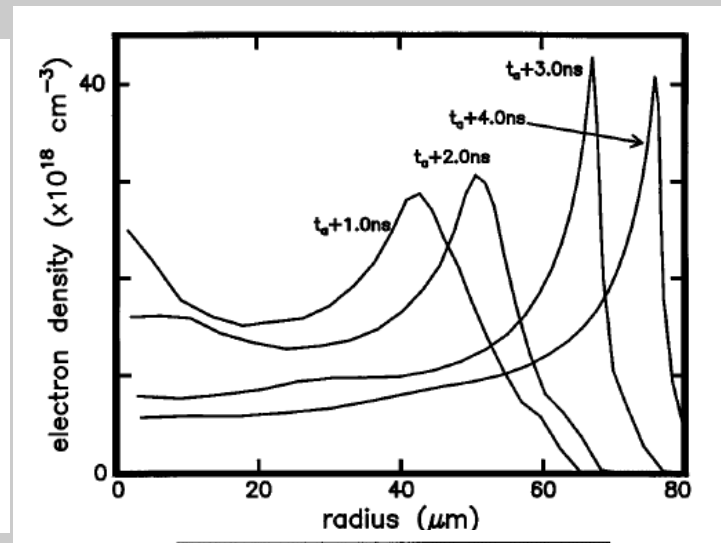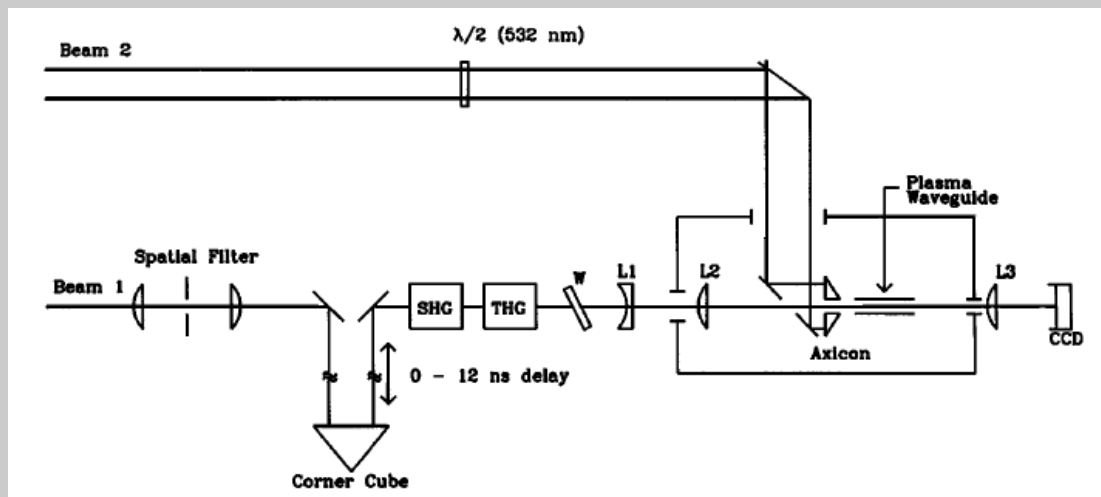


guided beam

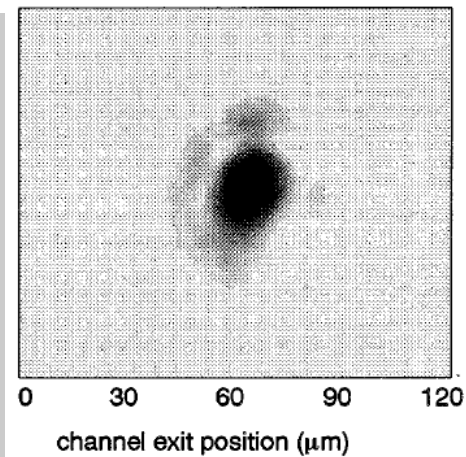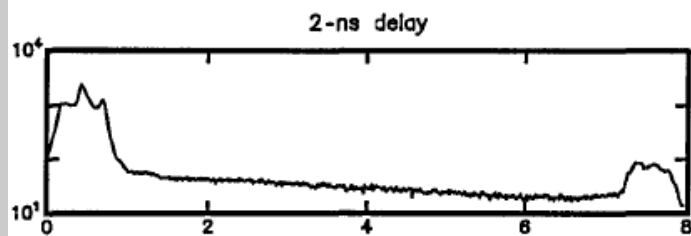

Generalizations for gradient index ABCD

- If $k_2 < 0$, refractive index parabola is inverted:
 $\cos[]$ to $\cosh[]$
 - Beam defocuses
- Gain guiding:
 - Gain and loss are represented as complex index

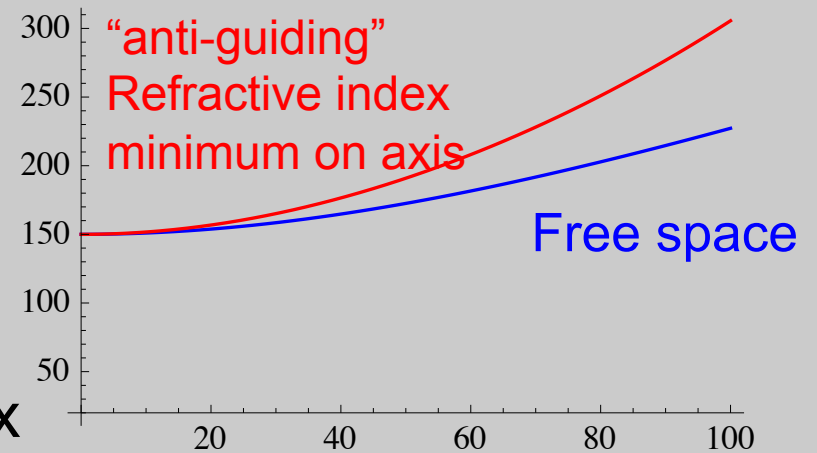

$$n(r) = n_0 \left(1 - i \frac{\alpha_2}{2k} r^2 \right) \quad \text{For } e^{-ikz} \text{ convention, gain for } \alpha_2 < 0$$

- Diffractive loss is compensated by gain along axis
- Guided mode has convex wavefronts
- Gain guiding leads to a breaking of rule: wavefront will not generally match end mirrors!